


VARIABLE HYDRAULIC BANKING TRACKS

INNOVATION AND PRESTIGE RUN TOGETHER

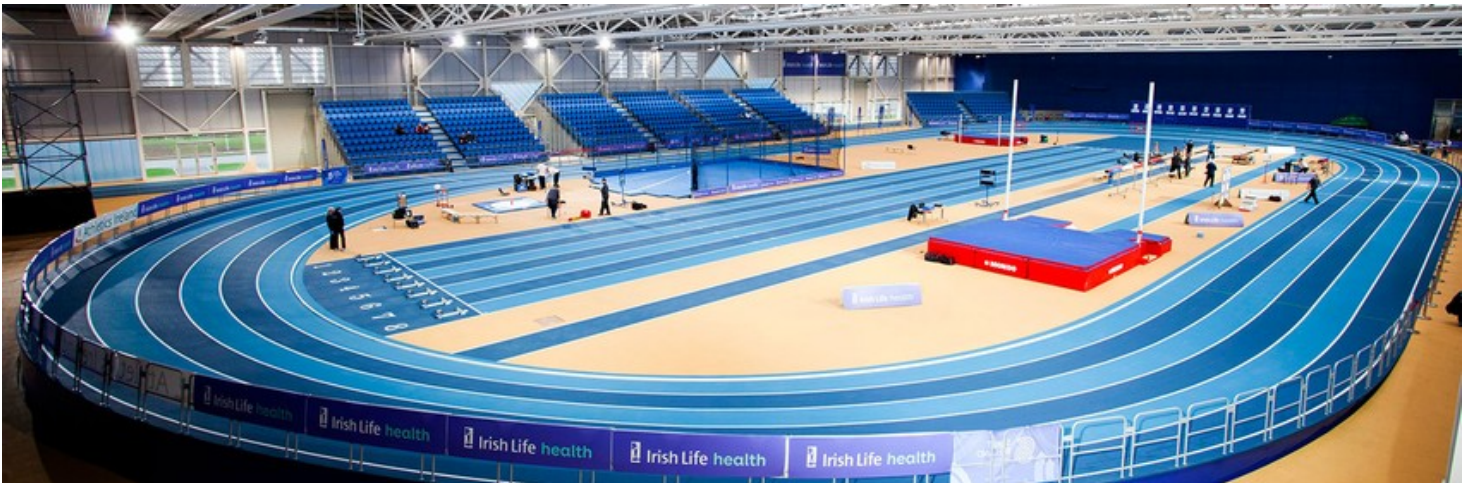

MONDO WAS THE FIRST TO PRODUCE A VARIABLE HYDRAULIC BANKING TRACK. THIS UNIQUE SYSTEM WAS INSTALLED FOR THE FIRST TIME IN 1987 AT THE NATIONAL INSTITUTE FOR FITNESS AND SPORT IN INDIANAPOLIS, INDIANA, AND IS NOW USED AT FINE TRAINING AND HIGH-LEVEL COMPETITION CENTERS. WHAT MAKES MODULTRACK'S VARIABLE HYDRAULIC BANKING TRACKS UNIQUE IS THAT THEY ARE CONTROLLED USING AN INNOVATIVE PLC (PROGRAMMABLE LOGIC CONTROL) SYSTEM FOR EASE OF USE AND OPTIMAL CURVE PROGRESSION AT EVERY INCLINE.

MONDO produces the only commercially available variable banking tracks with a hydraulic system. With the push of a button, the track's curves can be raised to the desired height in minutes for competitions or training sessions. Once lowered, the track is flush with the surrounding surface and the entire area can be used for other sports or activities. The ease of use in setting any desired incline makes the product extremely versatile. Every athlete, from beginners to world-class runners, can benefit from this track.

CURVES THAT MEET THE HIGHEST EXPECTATIONS

With the push of a button, the track's curves can be raised to the desired height in minutes for competitions or training sessions. The hydraulically controlled tracks can be set at any intermediate position, making them ideal for all kinds of training activities by athletes of any level. MONDO defines the curve radius, the lateral incline and the horizontal and vertical transitions between straightaways and curves based on the most advanced biomechanical research and on its unbeatable experience in high-level competitions. Once lowered, the track is flush with the surrounding surface and the entire area can be used for other sports or activities, gaining additional space with the removal (and storage on custom-made carts) of the modular railing around the external perimeter.

MONDOTRACK WS 13.5 MM I / VERSION

I / VERSION

THICKNESS

13,5 mm

WEIGHT

12,6 kg/m²


LENGTH

6÷15 m


HEIGHT

122÷160 cm


COLOR RANGE



P18



P58




P14



P85




P31



P30



P10



P70

SPORTFLEX SUPER X 6 MM I / VERSION

I / VERSION

THICKNESS

6 mm

WEIGHT

6,2 kg/m²

LENGTH

6÷20 m

HEIGHT

122÷183 cm

COLOR RANGE

INDOOR&OUTDOOR



P30



P58



P10



P14



P18



P70



P85



P31

SPORTFLEX SUPER X 8 MM I / VERSION

I / VERSION

THICKNESS

8 mm

WEIGHT

8,0 kg/m²

LENGTH

6÷18 m

HEIGHT

122÷183 cm

COLOR RANGE


INDOOR&OUTDOOR




P30




P58



P10



P14



P18



P70



P85



P31

SPORTFLEX SUPER X 11 MM I / VERSION

I / VERSION

THICKNESS

11 mm

WEIGHT

11,3 kg/m²

LENGTH

6÷17 m

HEIGHT

122÷160 cm

COLOR RANGE

INDOOR&OUTDOOR




P30




P58



P10



P14



P18



P70



P85



P31